


UBITTER

THE INNOVATION OF LIGHTS LED



www.ubitter.com

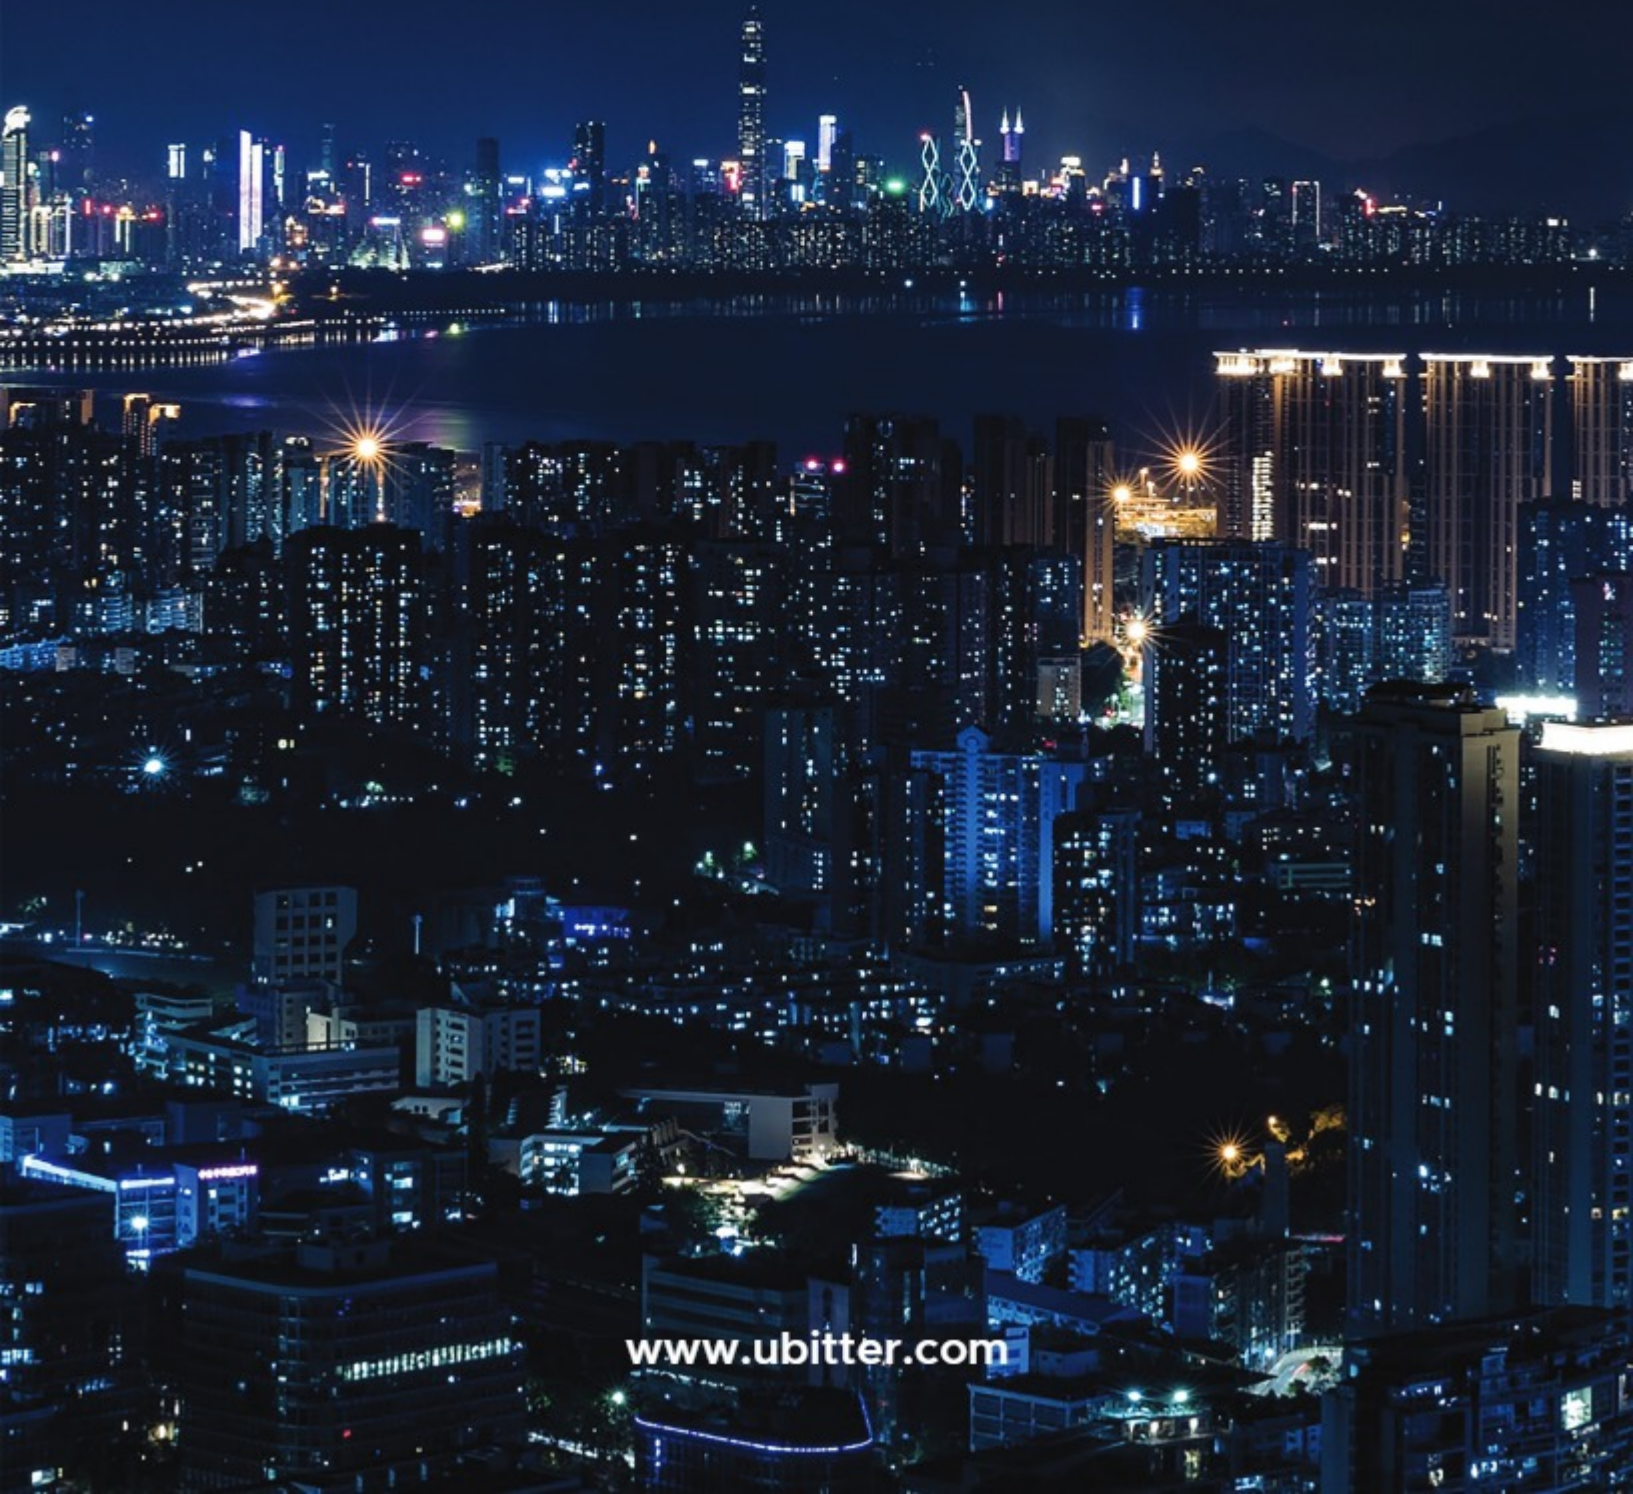

We will bring you the light

We are located in Kerala fabled as the God's Own Country and looking to brighten the world around you when the natural light fades away. With our top-quality LED solution, you can rest confidently.

UBITTER
THE INNOVATION OF LIGHTS LED

UBITTER

THE INNOVATION OF LIGHTS LED

UBITTER TECHNOLOGIES is an ISO 9001-2015, TUV and BIS certified products and accommodations company dedicated exclusively for designing, development and engenderment of quality LED lighting and solar products. We design develop and manufacture LED products which are energy efficient and environmentally amicable. We develop standard LED products for offices and decorative products for domestic and industrial purposes like stadiums, ware- houses etc...

Our Manufacturing facility is at Haryana & Cochin, equipped with state of the art machineries to manufacture. to manufacture diverse electronic products with great efficiency. Our highly experienced manufacturing team makes sure that each and every product, that is rolled out of the facility is of very good quality. Our engenderment our capacity is 1 Lakh LED products per day.






We have a multi-stage quality assurance system

As a client - first manufacturer, we have always tendered matchless importance to quality of the products that we manufacture. We have a multi - stage quality assurance system that allows us to ensure the quality of the products that we make even from the very first stage of acquiring the raw materials. As part of our quality assurance system, we only source the required raw materials only from trusted suppliers and companies. We carry out extensive and routine quality appraisals with the help of a dedicated Quality Assurance Team to make sure that the products we develop perform as per our expectations and promises. Our commitment to quality and world-class product helped us to be certified under BIS and ISO, two accolades to our wholehearted efforts to serve and support our clients better. Our hard - work helped us to have NABL tested and approved.



International quality standards

Our quality conscious approach coupled with dedication towards technological advancements has enabled us to carve a niche for ourselves in the industry. Our specialization in offering high quality lighting solutions has made us a favourable choice of our clients. Based on the intensive research and analysis of our R & D personnel, we are capable of designing technologically advanced range of products in accordance with international quality standards. We are engaged in constant up-gradation of range that has enabled us to carve a niche for ourselves in the national market.

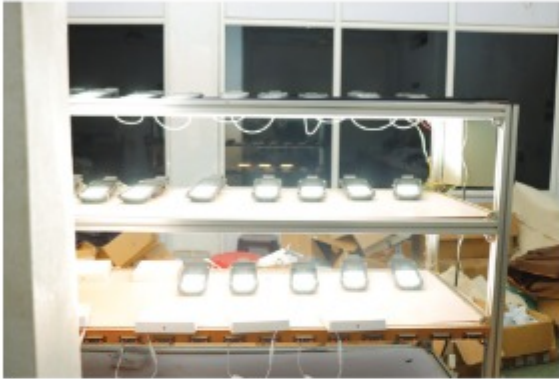

Certifications and Approvals

An inventive and futuristic company, we have an exceptional research and development facility exclusively for LED lights. The proprietary quality policies and multi-staged quality assurance systems statutory govt bodies.

CE

ISO

LM80

LM79

IP66

BIS

Each of these certifications and approvals is considered a feather in our cap which empowers our constant endeavors to offer all our clients with nothing but the best LED lights as per their quality expectations and pricing requirements. As part of our quality assurance policies, our technicians are constantly trained in the latest technologies being invented and made available in the market to transfer the benefits directly to the clients no matter the tweaks that we need to make our existing designing, manufacturing, testing systems and techniques.

We also consider these certifications and approvals as the necessary coqs of our commitment and vision to offer our clients with advance lighting solutions without even compromising on the quality or having to pay a higher price.



LM80

LM79



BULBS SERIES

- High quality poly - carbonate & aluminium housing
- Suitable for domestic lighting applications
- Color temperature available in 6500k, 4000k & 3000k
- No mercury content, eco-friendly
- Available in B 22 and E 27 holder cap
- 240 degree of Luminance angle
- High power factor above 0.9



PRODUCT NAME	PRODUCT CODE	POWER (W)	END CAP	SIZE	POWER FACTOR (PF)	OPERATING VOLTAGE (V AC)	CCT	CRI	Lm/W	BEAM ANGLE
9W BULB COOL B22	UB BB22C 09W	9W	B22	A 60	>0.9	185-265	6500K	>80	100	240°
9W BULB COOL E27	UB BE27C 09W	9W	E27	A 60	>0.9	185-265	6500K	>80	100	240°
9W BULB NEUTRAL E27	UB BE27N 09W	9W	E27	A 60	>0.9	185-265	4000K	>80	100	240°
9W BULB NEUTRAL B22	UB BB22N 09W	9W	B22	A 60	>0.9	185-265	4000K	>80	100	240°
9W BULB WARM B22	UB BE27W 09W	9W	B22	A 60	>0.9	185-265	3000K	>80	100	240°
9W BULB WARM E27	UB BB22W 09W	9W	E27	A 60	>0.9	185-265	3000K	>80	100	240°
12W BULB COOL B22	UB BB22C 12W	12W	B22	A 60	>0.9	185-265	6500K	>80	100	240°
12W BULB COOL E27	UB BE27C 12W	12W	E27	A 60	>0.9	185-265	6500K	>80	100	240°
12W BULB NEUTRAL E27	UB BE27N 12W	12W	E27	A 60	>0.9	185-265	4000K	>80	100	240°
12W BULB NEUTRAL B22	UB BB22N 12W	12W	B22	A 60	>0.9	185-265	4000K	>80	100	240°
12W BULB WARM B22	UB BE27W 12W	12W	B22	A 60	>0.9	185-265	3000K	>80	100	240°
12W BULB WARM E27	UB BB22W 12W	12W	E27	A 60	>0.9	185-265	3000K	>80	100	240°

ANTI - MOSQUITO BULBS SERIES



- High quality poly - carbonate & aluminium housing
- Suitable for domestic lighting applications
- Color temperature available in 6500k
- No mercury content, eco-friendly
- Available in B 22 holder cap



PRODUCT NAME	PRODUCT CODE	POWER (W)	END CAP	POWER FACTOR (PF)	OPERATING VOLTAGE (V AC)	CCT	CRI	Lm/W	BEAM ANGLE
ANTI-MOSQUITO BULB 15W	UB-MSB-15W	15W	B22	>0.5	185-265	6500K	>80	100	180°

SLIM PANEL LIGHTS- GLOW SERIES

- High quality aluminium diecast housing
- Suitable for domestic & commercial lighting applications
- Color temperature available in 6500k, 4000k and 3000k
- Body shapes available in round and square
- No mercury content, eco-friendly
- High power factor above 0.9
- High quality LGP used for perfect eye protection



PRODUCT NAME	PRODUCT CODE	POWER (W)	POWER FACTOR (PF)	OPERATING VOLTAGE (V AC)	CCT	Lm/W	CRI	MATERIAL	CUT OUT DIMENSION (MM)	SHAPE
3W PANEL LIGHT ROUND COOL- GLOW	UBG-PLRC-03W	3W	>0.9	85 -265	6500K	110	>80	DIE CAST ALUMINIUM	70	ROUND
3W PANEL LIGHT ROUND NEUTRAL - GLOW	UBG-PLRN-03W	3W	>0.9	85 -265	4000K	110	>80	DIE CAST ALUMINIUM	70	ROUND
3W PANEL LIGHT ROUND WARM- GLOW	UBG-PLRW-03W	3W	>0.9	85 -265	3000K	110	>80	DIE CAST ALUMINIUM	70	SQUARE
3W PANEL LIGHT SQUARE COOL- GLOW	UBG-PLSC-03W	3W	>0.9	85 -265	6500K	110	>80	DIE CAST ALUMINIUM	70	SQUARE
3W PANEL LIGHT SQUARE NEUTRAL - GLOW	UBG-PLSN-03W	3W	>0.9	85 -265	4000K	110	>80	DIE CAST ALUMINIUM	70	SQUARE
3W PANEL LIGHT SQUARE WARM- GLOW	UBG-PLSW-03W	3W	>0.9	85 -265	3000K	110	>80	DIE CAST ALUMINIUM	70	ROUND
6W PANEL LIGHT ROUND COOL- GLOW	UBG-PLRC-06W	6W	>0.9	85 -265	6500K	110	>80	DIE CAST ALUMINIUM	105	ROUND
6W PANEL LIGHT ROUND NEUTRAL - GLOW	UBG-PLRN-06W	6W	>0.9	85 -265	4000K	110	>80	DIE CAST ALUMINIUM	105	ROUND
6W PANEL LIGHT ROUND WARM- GLOW	UBG-PLRW-06W	6W	>0.9	85 -265	3000K	110	>80	DIE CAST ALUMINIUM	105	ROUND
6W PANEL LIGHT SQUARE COOL- GLOW	UBG-PLSC-06W	6W	>0.9	85 -265	6500K	110	>80	DIE CAST ALUMINIUM	105	SQUARE
6W PANEL LIGHT SQUARE NEUTRAL - GLOW	UBG-PLSN-06W	6W	>0.9	85 -265	4000K	110	>80	DIE CAST ALUMINIUM	105	SQUARE
6W PANEL LIGHT SQUARE WARM- GLOW	UBG-PLSW-06W	6W	>0.9	85 -265	3000K	110	>80	DIE CAST ALUMINIUM	105	SQUARE
9W PANEL LIGHT ROUND COOL- GLOW	UBG-PLRC-09W	9W	>0.9	85 -265	6500K	110	>80	DIE CAST ALUMINIUM	130	ROUND
9W PANEL LIGHT ROUND NEUTRAL - GLOW	UBG-PLRN-09W	9W	>0.9	85 -265	4000K	110	>80	DIE CAST ALUMINIUM	130	ROUND
9W PANEL LIGHT ROUND WARM- GLOW	UBG-PLRW-09W	9W	>0.9	85 -265	3000K	110	>80	DIE CAST ALUMINIUM	130	ROUND
9W PANEL LIGHT SQUARE COOL- GLOW	UBG-PLSC-09W	9W	>0.9	85 -265	6500K	110	>80	DIE CAST ALUMINIUM	130	SQUARE

SLIM PANEL LIGHTS - GLOW SERIES

9W PANEL LIGHT SQUARE NEUTRAL - GLOW	UBG-PLSN-09W	9W	>0.9	85 -265	4000K	110	>80	DIE CAST ALUMINIUM	130	SQUARE
9W PANEL LIGHT SQUARE WARM - GLOW	UBG-PLSW-09W	9W	>0.9	85 -265	3000K	110	>80	DIE CAST ALUMINIUM	130	SQUARE
12W PANEL LIGHT ROUND COOL - GLOW	UBG-PLRC-12W	12W	>0.9	85 -265	6500K	110	>80	DIE CAST ALUMINIUM	155	ROUND
12W PANEL LIGHT ROUND NEUTRAL - GLOW	UBG-PLRN-12W	12W	>0.9	85 -265	4000K	110	>80	DIE CAST ALUMINIUM	155	ROUND
12W PANEL LIGHT ROUND WARM - GLOW	UBG-PLRW-12W	12W	>0.9	85 -265	3000K	110	>80	DIE CAST ALUMINIUM	155	ROUND
12W PANEL LIGHT SQUARE COOL - GLOW	UBG-PLSC-12W	12W	>0.9	85 -265	6500K	110	>80	DIE CAST ALUMINIUM	155	SQUARE
12W PANEL LIGHT SQUARE NEUTRAL - GLOW	UBG-PLSN-12W	12W	>0.9	85 -265	4000K	110	>80	DIE CAST ALUMINIUM	155	SQUARE
12W PANEL LIGHT SQUARE WARM - GLOW	UBG-PLSW-12W	12W	>0.9	85 -265	3000K	110	>80	DIE CAST ALUMINIUM	155	SQUARE
18W PANEL LIGHT ROUND COOL - GLOW	UBG-PLRC-18W	18W	>0.9	85 -265	6500K	110	>80	DIE CAST ALUMINIUM	205	ROUND
18W PANEL LIGHT ROUND NEUTRAL - GLOW	UBG-PLRN-18W	18W	>0.9	85 -265	4000K	110	>80	DIE CAST ALUMINIUM	205	ROUND
18W PANEL LIGHT ROUND WARM - GLOW	UBG-PLRW-18W	18W	>0.9	85 -265	3000K	110	>80	DIE CAST ALUMINIUM	205	ROUND
18W PANEL LIGHT SQUARE COOL - GLOW	UBG-PLSC-18W	18W	>0.9	85 -265	6500K	110	>80	DIE CAST ALUMINIUM	205	SQUARE
18W PANEL LIGHT SQUARE NEUTRAL - GLOW	UBG-PLSN-18W	18W	>0.9	85 -265	4000K	110	>80	DIE CAST ALUMINIUM	205	SQUARE
18W PANEL LIGHT SQUARE WARM - GLOW	UBG-PLSW-18W	18W	>0.9	85 -265	3000K	110	>80	DIE CAST ALUMINIUM	205	SQUARE
24W PANEL LIGHT SQUARE COOL - GLOW	UBG-PLRC-24W	24W	>0.9	85 -265	6500K	110	>80	DIE CAST ALUMINIUM	275	SQUARE
24W PANEL LIGHT SQUARE NEUTRAL - GLOW	UBG-PLRN-24W	24W	>0.9	85 -265	4000K	110	>80	DIE CAST ALUMINIUM	275	SQUARE
24W PANEL LIGHT SQUARE WARM - GLOW	UBG-PLRW-24W	24W	>0.9	85 -265	3000K	110	>80	DIE CAST ALUMINIUM	275	SQUARE

JUNCTION BOX LED LIGHTS-STAR



- Suitable for domestic & commercial applications
- Color temperature available in 6500k, 3000k red, blue, green & pink
- Body shape - round
- No mercury content, eco-friendly
- High power factor above 0.9



PRODUCT NAME	PRODUCT CODE	POWER (W)	POWER FACTOR (PF)	OPERATING VOLTAGE (V AC)	CCT	CRI	Lm/W	CUT OUT DIMENSION (MM)	SHAPE
JUNCTION BOX STAR COOL 3W	UB-JBSC-03W	3W	>0.9	175 - 265	COOL	>80	110	35	ROUND
JUNCTION BOX STAR WARM 3W	UB-JBSW-03W	3W	>0.9	175 - 265	WARM	>80	110	35	ROUND
JUNCTION BOX STAR BLUE 3W	UB-JBSB-03W	3W	>0.9	175 - 265	BLUE	>80	110	35	ROUND
JUNCTION BOX STAR RED 3W	UB-JBSR-03W	3W	>0.9	175 - 265	RED	>80	110	35	ROUND
JUNCTION BOX STAR GREEN 3W	UB-JBSG-03W	3W	>0.9	175 - 265	GREEN	>80	110	35	ROUND
JUNCTION BOX STAR PINK 3W	UB-JBSP-03W	3W	>0.9	175 - 265	PINK	>80	110	35	ROUND

FLOOD LIGHTS- GALAXY SERIES



- High quality aluminium diecast housing
- Suitable for commercial, industrial & public lighting applications
- Color temperature available in 6500k & 3000k
- No mercury content, eco-friendly
- High power factor above 0.9
- Surge protection up to 6 KV
- IP protection grade - IP 66



PRODUCT NAME	PRODUCT CODE	POWER (W)	POWER FACTOR (PF)	SURGE (KV)	OPERATING VOLTAGE (V AC)	CCT	CRI	LM/W	BEAM ANGLE	PROTECTION GRADE
FLOOD LIGHT GALAXY 30W COOL	UB-FDGAC-30W	30W	>0.9	6	85 - 265	6500K	>80	120	120°	IP 66
FLOOD LIGHT GALAXY 30W WARM	UB-FDGAW-30W	30W	>0.9	6	85 - 265	3000K	>80	120	120°	IP 66
FLOOD LIGHT GALAXY 50W COOL	UB-FDGAC-50W	50W	>0.9	6	85 - 265	6500K	>80	120	120°	IP 66
FLOOD LIGHT GALAXY 50W WARM	UB-FDGAW-50W	50W	>0.9	6	85 - 265	3000K	>80	120	120°	IP 66
FLOOD LIGHT GALAXY 100W COOL	UB-FDGAC-100W	100W	>0.9	6	85 - 265	6500K	>80	120	120°	IP 66
FLOOD LIGHT GALAXY 100W WARM	UB-FDGAW-100W	100W	>0.9	6	85 - 265	3000K	>80	120	120°	IP 66
FLOOD LIGHT GALAXY 150W COOL	UB-FDGAC-150W	150W	>0.9	6	85 - 265	6500K	>80	120	120°	IP 66
FLOOD LIGHT GALAXY 150W WARM	UB-FDGAW-150W	150W	>0.9	6	85 - 265	3000K	>80	120	120°	IP 66
FLOOD LIGHT GALAXY 200W COOL	UB-FDGAC-200W	200W	>0.9	6	85 - 265	6500K	>80	120	120°	IP 66
FLOOD LIGHT GALAXY 200W WARM	UB-FDGAW-200W	200W	>0.9	6	85 - 265	3000K	>80	120	120°	IP 66
FLOOD LIGHT GALAXY 300W COOL	UB-FDGAC-300W	300W	>0.9	6	85 - 265	6500K	>80	120	120°	IP 66



HIGH MAST LIGHTS SERIES



- High quality aluminium diecast housing
- Suitable for public lighting applications
- Color temperature available in 6500k
- Used high quality bridgelux led chip
- No mercury content, eco-friendly
- High power factor above 0.9
- Surge protection up to 8-20 KV
- IP protection grade - IP 67



PRODUCT NAME	PRODUCT CODE	POWER (W)	POWER FACTOR (PF)	OPERATING VOLTAGE (V AC)	CCT	CRI	LM/W	SURGE (KV)	PROTECTION GRADE	BODY
HIGH MAST FLOOD LIGHT 100W COOL	UB-HMCW-100W	100W	>0.9	85-265	6500K	>80	130	8-20 KV	IP 67	ALUMINIUM DIECAST
HIGH MAST FLOOD LIGHT 150W COOL	UB-HMCW-150W	150W	>0.9	85-265	6500K	>80	130	8-20 KV	IP 67	ALUMINIUM DIECAST
HIGH MAST FLOOD LIGHT 200W COOL	UB-HMCW-200W	200W	>0.9	85-265	6500K	>80	130	8-20 KV	IP 67	ALUMINIUM DIECAST
HIGH MAST FLOOD LIGHT 250W COOL	UB-HMCW-250W	250W	>0.9	85-265	6500K	>80	130	8-20 KV	IP 67	ALUMINIUM DIECAST
HIGH MAST FLOOD LIGHT 300W COOL	UB-HMCW-300W	300W	>0.9	85-265	6500K	>80	130	8-20 KV	IP 67	ALUMINIUM DIECAST

STREET LIGHTS- LEAF SERIES



- High quality aluminium diecast housing
- Suitable for commercial, industrial & public lighting applications
- Color temperature available in 6500k
- No mercury content, eco-friendly
- High power factor above 0.9
- Surge protection up to 6 KV
- IP protection grade - IP 65



PRODUCT NAME	PRODUCT CODE	POWER (W)	POWER FACTOR (PF)	OPERATING VOLTAGE (V AC)	CCT	CRI	LM/W	PROTECTION GRADE	BEAM ANGLE	SURGE (KV)
50W STREET LIGHT LEAF MODEL	UB-STLEAF-50W	50W	>0.9	85 - 265	6500K	>80	150	IP 65	120°	6
60W STREET LIGHT LEAF MODEL	UB-STLEAF-60W	60W	>0.9	85 - 265	6500K	>80	150	IP 65	120°	6
100W STREET LIGHT LEAF MODEL	UB-STLEAF-100W	100W	>0.9	85 - 265	6500K	>80	150	IP 65	120°	6
120W STREET LIGHT LEAF MODEL	UB-STLEAF-120W	120W	>0.9	85 - 265	6500K	>80	150	IP 65	120°	6
150W STREET LIGHT LEAF MODEL	UB-STLEAF-150W	150W	>0.9	85 - 265	6500K	>80	150	IP 65	120°	6
200W STREET LIGHT LEAF MODEL	UB-STLEAF-200W	200W	>0.9	85 - 265	6500K	>80	150	IP 65	120°	6

STREET LIGHTS- LENS SERIES



- High quality aluminium diecast housing
- Suitable for commercial, industrial & public lighting applications
- Color temperature available in 6500k
- No mercury content, eco-friendly
- High power factor above 0.9
- Surge protection up to 4 KV
- IP protection grade - IP 66



PRODUCT NAME	PRODUCT CODE	POWER (W)	POWER FACTOR (PF)	OPERATING VOLTAGE (V AC)	CCT	CRI	LM/W	PROTECTION GRADE	BEAM ANGLE	SURGE (KV)
20W STREET LIGHT LENS	UB-ST LEN - 20W	20W	>0.9	85 - 265	6500K	>80	130	IP 66	120°	4
24W STREET LIGHT LENS	UB-ST LEN - 24W	24W	>0.9	85 - 265	6500K	>80	130	IP 66	120°	4
32W STREET LIGHT LENS	UB-ST LEN - 32W	32W	>0.9	85 - 265	6500K	>80	130	IP 66	120°	4
36W STREET LIGHT LENS	UB-ST LEN - 36W	36W	>0.9	85 - 265	6500K	>80	130	IP 66	120°	4
50W STREET LIGHT LENS	UB-ST LEN - 50W	50W	>0.9	85 - 265	6500K	>80	130	IP 66	120°	4
72W STREET LIGHT LENS	UB-ST LEN - 72W	72W	>0.9	85 - 265	6500K	>80	130	IP 66	120°	4
76W STREET LIGHT LENS	UB-ST LEN - 76W	76W	>0.9	85 - 265	6500K	>80	130	IP 66	120°	4
100W STREET LIGHT LENS	UB-ST LEN - 100W	100W	>0.9	85 - 265	6500K	>80	130	IP 66	120°	4

STREET LIGHTS- PLATINUM SERIES



- High quality aluminium diecast housing
- Suitable for commercial, industrial & public lighting applications
- Color temperature available in 6500k
- No mercury content, eco-friendly
- High power factor above 0.9
- Surge protection up to 4 KV
- IP protection grade - IP 65



PRODUCT NAME	PRODUCT CODE	POWER (W)	POWER FACTOR (PF)	OPERATING VOLTAGE (V AC)	CCT	CRI	LM/W	PROTECTION GRADE	BEAM ANGLE	SURGE (KV)
18W STREET LIGHT PLATINUM	UB- ST PLT - 18W	18W	>0.9	85 - 265	6500K	>80	110	IP 65	120°	4
20W STREET LIGHT PLATINUM	UB-ST PLT - 20W	20W	>0.9	85 - 265	6500K	>80	110	IP 65	120°	4
24W STREET LIGHT PLATINUM	UB-ST PLT - 24W	24W	>0.9	85 - 265	6500K	>80	110	IP 65	120°	4
30W STREET LIGHT PLATINUM	UB-ST PLT - 30W	30W	>0.9	85 - 265	6500K	>80	110	IP 65	120°	4
32W STREET LIGHT PLATINUM	UB-ST PLT - 32W	32W	>0.9	85 - 265	6500K	>80	110	IP 65	120°	4
36W STREET LIGHT PLATINUM	UB-ST PLT - 36W	36W	>0.9	85 - 265	6500K	>80	110	IP 65	120°	4
50W STREET LIGHT PLATINUM	UB-ST PLT - 50W	50W	>0.9	85 - 265	6500K	>80	110	IP 65	120°	4
72W STREET LIGHT PLATINUM	UB-ST PLT - 72W	72W	>0.9	85 - 265	6500K	>80	110	IP 65	120°	4
76W STREET LIGHT PLATINUM	UB-ST PLT - 76W	76W	>0.9	85 - 265	6500K	>80	110	IP 65	120°	4
100W STREET LIGHT PLATINUM	UB-ST PLT - 100W	100W	>0.9	85 - 265	6500K	>80	110	IP 65	120°	4
120W STREET LIGHT PLATINUM	UB-ST PLT - 120W	120W	>0.9	85 - 265	6500K	>80	110	IP 65	120°	4



HIGH BAY LIGHTS SERIES



- High quality aluminium housing
- Suitable for commercial & industrial lighting applications
- Color temperature available in 6500k
- No mercury content, eco-friendly
- High power factor above 0.9
- Used high luminance LED



PRODUCT NAME	PRODUCT CODE	POWER (W)	POWER FACTOR (PF)	SURGE (KV)	OPERATING VOLTAGE (V AC)	CCT	CRI	LM/W	MOUNTING	BODY
HIGH BAY LIGHT 100W	UB-HBCW-100W	100W	>0.9	4	85 - 265	6500K	>80	110	POLE MOUNTING & HANGING	ALUMINIUM
HIGH BAY LIGHT 150W	UB-HBCW-150W	150W	>0.9	4	85 - 265	6500K	>80	110	POLE MOUNTING & HANGING	ALUMINIUM
HIGH BAY LIGHT 200W	UB-HBCW-200W	200W	>0.9	4	85 - 265	6500K	>80	110	POLE MOUNTING & HANGING	ALUMINIUM

ANTI - EXPLOSIVE LIGHTS SERIES



- High quality aluminium diecast housing
- Suitable for industrial & defence application
- Color temperature available in 6500k, 3000k
- No mercury content, eco-friendly
- 100% higher protected
- High power factor above 0.9
- Surge protection up to 6 KV
- IP protection grade - IP 65



PRODUCT NAME	PRODUCT CODE	POWER (W)	POWER FACTOR (PF)	OPERATING VOLTAGE (V AC)	CCT	CRI	PROTECTION GRADE	LM/W
6W FIRE PROOF EXIT LED SIGN	UB-FIREXT-06W	6W	>0.9	85 - 265	3000K	>80	IP 65	110
20W FIRE PROOF TUBELIGHT DOUBLE TUBE - WARM	UB-FIRTL2W-40W	20W	>0.9	85 - 265	3000K	>80	IP 65	110
20W FIRE PROOF TUBELIGHT SINGLE TUBE - WARM	UB-FIRTL1W-20W	20W	>0.9	85 - 265	3000K	>80	IP 65	110
30W FIRE PROOF DOWN LIGHT - COOL	UB-FIRDLC-30W	30W	>0.9	85 - 265	6500K	>80	IP 65	110
50W FIRE PROOF DOWN LIGHT - COOL	UB-FIRDLC-50W	50W	>0.9	85 - 265	6500K	>80	IP 65	110
50W FIRE PROOF DOWN LIGHT - WARM	UB-FIRDW-50W	50W	>0.9	85 - 265	3000K	>80	IP 65	110
50W FIRE PROOF FLOOD LIGHT - COOL	UB-FIRFLC-50W	50W	>0.9	85 - 265	6500K	>80	IP 65	110
50W FIRE PROOF FLOOD LIGHT - WARM	UB-FIRFLW-50W	50W	>0.9	85 - 265	3000K	>80	IP 65	110



OUTDOOR UP DOWN LIGHTS

- IP 65
- Suitable for Wall, compound wall, gate, garden



PRODUCT NAME	PRODUCT CODE	POWER (W)	CCT
5W K LIGHT SINGLE WARM	UB-K WW -5W	5W	3000K
10W K LIGHT DOUBLE WARM	UB-K WW-10W	10W	3000K



PRODUCT NAME	PRODUCT CODE	POWER (W)	CCT
4W 4WAY OUTDOOR LIGHT WARM	UB-4WAY WW-4W	4W	3000K



PRODUCT NAME	PRODUCT CODE	POWER (W)	CCT
2W UPDOWN LIGHT 1"1 WARM	UB-DW-2W	2W	3000K
4W UPDOWN LIGHT 2"2 WARM	UB-DW-4W	4W	3000K
6W UPDOWN LIGHT 3"3 WARM	UB-DW-6W	6W	3000K



PRODUCT NAME	PRODUCT CODE	POWER (W)	CCT
10W GOLDEN UPDOWN LIGHT 1"1	UB-GLD-10-W	10W	3000K

LED STRIP & DRIVERS SERIES



PRODUCT NAME	PRODUCT CODE	OPERATING VOLTAGE IV ACI	COLOR	CRI	LM/W
LED STRIP 120LED 2835 COOL	UB-SP120CW	>0.9	COOL	>80	110
LED STRIP 120LED 2835 WARM	UB-SP120WW	>0.9	WARM	>80	110
LED STRIP 120LED 2835 RED	UB-SP120RE	>0.9	RED	>80	110
LED STRIP 120LED 2835 BLUE	UB-SP120BL	>0.9	BLUE	>80	110
LED STRIP 120LED 2835 GREEN	UB-SP120GR	>0.9	GREEN	>80	110
LED STRIP 120LED 2835 PINK	UB-SP120PK	>0.9	PINK	>80	110
LED STRIP 120LED 2835 RGB	UB-SP120RGB	>0.9	RGB	>80	110
LED STRIP DRIVE 2A	UB-DV2A	>0.9			
LED STRIP DRIVE 5A	UB-DV5A	>0.9			
LED STRIP DRIVE 10A	UB-DV10A	>0.9			



TRACK LIGHTS & CHANNEL - ECO SERIES



- High quality aluminium diecast body
- Suitable for commercial & industrial applications
- Color temperature available in cool white, warm white
- Contained no mercury, highly eco-friendly
- High power factor above 0.9
- It will rotate 360 degree



PRODUCT NAME	PRODUCT CODE	POWER (W)	OPERATING VOLTAGE (V AC)	CCT	CRI	POWER FACTOR	BEAM ANGLE	Lm/w
TRACK LIGHT 10W BLACK WARM - ECO	UB-TR ECO BW -20W	10W	165-275	3000K	>80	>0.9	30°	95
TRACK LIGHT 20W BLACK WARM - ECO	UB-TR ECO BW -30W	20W	165-275	3000K	>80	>0.9	30°	95
TRACK LIGHT 30W BLACK WARM - ECO	UB-TR ECO BW -10W	30W	165-275	3000K	>80	>0.9	30°	95
TRACK LIGHT 10W BLACK COOL - ECO	UB-TR ECO BC -10W	10W	165-275	6500K	>80	>0.9	30°	95
TRACK LIGHT 20W BLACK COOL - ECO	UB-TR ECO BC-20W	20W	165-275	6500K	>80	>0.9	30°	95
TRACK LIGHT 30W BLACK COOL - ECO	UB-TR ECO BC-30W	30W	165-275	6500K	>80	>0.9	30°	95
TRACK LIGHT 10W WHITE COOL - ECO	UB-TR ECO WC-10W	10W	165-275	6500K	>80	>0.9	30°	95
TRACK LIGHT 20W WHITE COOL - ECO	UB-TR ECO WC-20W	20W	165-275	6500K	>80	>0.9	30°	95
TRACK LIGHT 30W WHITE COOL - ECO	UB-TR ECO WC-30W	30W	165-275	6500K	>80	>0.9	30°	95
TRACK LIGHT 10W WHITE WARM - ECO	UB-TR ECO WW-10W	10W	165-275	3000K	>80	>0.9	30°	95
TRACK LIGHT 20W WHITE WARM - ECO	UB-TR ECO WW-20W	20W	165-275	3000K	>80	>0.9	30°	95
TRACK LIGHT 30W WHITE WARM - ECO	UB-TR ECO WW-30W	30W	165-275	3000K	>80	>0.9	30°	95
TRACK LIGHT CHANNEL BLACK 1 MTR	UB-TR ECO CH B							
TRACK LIGHT CHANNEL WHITE 1 MTR	UB-TR ECO CH W							

SWIMMING POOL LIGHTS

- High quality aluminium diecast body
- Suitable for commercial & industrial applications
- Contained no mercurry, highly eco-friendly



PRODUCT NAME	PRODUCT CODE	POWER (W)	VOLT.	IP GRADE	CCT
18W SWIMMING POOL LIGHT COOL	UB-SD-GB300CW-18W	18W	165 - 265	IP68	6500K
18W SWIMMING POOL LIGHT WARM	UB-SD-GB300WW-18W	18W	165 - 265	IP68	3000K
18W SWIMMING POOL LIGHT BLUE	UB-SD-GB300BL-18W	18W	165 - 265	IP68	BLUE
18W SWIMMING POOL LIGHT RGB	UB-SD-GB300RGB-18W	18W	165 - 265	IP68	RGB
24W SWIMMING POOL LIGHT COOL	UB-SD-GB300CW-24W	24W	165 - 265	IP68	6500K
24W SWIMMING POOL LIGHT WARM	UB-SD-GB300WW-24W	24W	165 - 265	IP68	3000K
18W SWIMMING POOL LIGHT WARM	UB-SD-GB280WW-18W	18W	165 - 265	IP68	3000K
18W SWIMMING POOL LIGHT RGB	UB-SD-GB280RGB-18W	18W	165 - 265	IP68	RGB
24W SWIMMING POOL LIGHT WARM	UB-SD-GB280WW-24W	24W	165 - 265	IP68	3000K
7.5W SWIMMING POOL LIGHT RGB	DL-PAR1RGB-7.5W	7.5W	165 - 265	IP68	RGB
15W SWIMMING POOL LIGHT RGB	DL-PAR1RGB-15W	15W	165 - 265	IP68	RGB
20W SWIMMING POOL LIGHT RGB	DL-PAR1RGB-20W	20W	165 - 265	IP68	RGB



INGROUND LIGHTS & FOUNTAIN LIGHTS

INGROUND LIGHTS



PRODUCT NAME	PRODUCT CODE	POWER (W)	IP GRADE	DIMENSION(MM)
INGROUND LIGHT 3W WARM SS BODY	UB-MDD-Y80-3W	3W	IP 65	D80*H80
INGROUND LIGHT 12W RGB SS BODY	UB-SD-Y180-12W	12W	IP 68	D180*H85

FOUNTAIN LIGHTS



PRODUCT NAME	PRODUCT CODE	POWER (W)	IP GRADE	VOLT
4"3W FOUNTAIN LIGHT SS BODY RGB	UB-SD-YA001	3W	IP 68	AC12V
6"3W FOUNTAIN LIGHT SS BODY RGB	UB-SD-YA002	3W	IP 68	AC12V
9"3W FOUNTAIN LIGHT SS BODY RGB	UB-SD-YA003	3W	IP 68	AC12V

SOLAR STREET LIGHTS SERIES




- High quality ABS plastic housing
- Suitable for commercial, industrial & public lighting applications
- No mercury content, eco-friendly
- Used high quality BIS certified ferro phosphate lithium battery
- Used BIS certified polycrystalline solar panels
- IP protection grade - IP 65



PRODUCT NAME	PRODUCT CODE	POWER (W)	BATTERY TYPE & CAPACITY	LM/W	MATERIAL	PROTECTION GRADE
SOLAR STREET LIGHT -30W	UB-SSL-30W	30W	3.2V/5000mA	110	ABS PLASTIC	IP 65
SOLAR STREET LIGHT -60W	UB-SSL-60W	60W	3.2V/10000mA	110	ABS PLASTIC	IP 65
SOLAR STREET LIGHT -90W	UB-SSL-90W	90W	3.2/150000mA	110	ABS PLASTIC	IP 65
SOLAR STREET LIGHT -120W	UB-SSL-120W	120W	3.2/20000mA	110	ABS PLASTIC	IP 65

CAPTRO SERIES SOLAR STREET LIGHTS

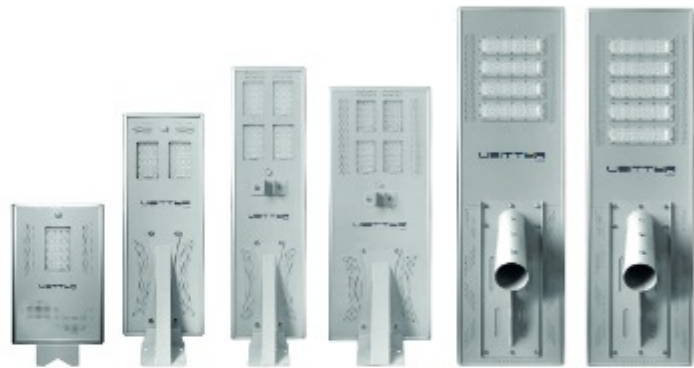

- High quality aluminium diecast housing
- Suitable for commercial, industrial & public lighting applications
- Color temperature available in 6500k
- No mercury content, eco-friendly
- IP protection grade - IP 65

PRODUCT NAME	PRODUCT CODE	POWER (W)	SOLAR PANEL	LUMEN (lm)	LiFePO ₄ BATTERY	CTN DIMENSION LxWxH (mm)
SOLAR STREET LIGHT CAPTRO -15W	UB-CS1931-15W	15W	18V20W	2.400	12.8V 9AH	570X350X135
SOLAR STREET LIGHT CAPTRO -20W	UB-CS1931-20W	20W	18V20W	3.200	12.8V 15AH	570X350X135
SOLAR STREET LIGHT CAPTRO -30W	UB-CS1931-30W	30W	18V50W	4.800	12.8V 21AH	950X350X210
SOLAR STREET LIGHT CAPTRO -40W	UB-CS1931-40W	40W	18V20W	6.400	12.8V 24AH	950X350X210

TESLA SERIES ALL IN ONE SOLAR FLOOD LIGHT SERIES



- High quality aluminium diecast housing
- Suitable for commercial, industrial & public lighting applications
- No mercury content, eco-friendly
- IP protection grade - IP 66

PRODUCT PARAMETER

PRODUCT NAME	PRODUCT CODE	POWER (W)	LUMEN (lm)	BATTERY CAPACITY	NUMBER OF LED (pcs)	LAMB BODY SIZE (MM)
ALL IN ONE SOLAR FLOOD LIGHT TESLA-100W	UB-CCTVF02-100W	100W	730	12000	82	214*179*45
ALL IN ONE SOLAR FLOOD LIGHT TESLA-200W	UB-CCTVF02-200W	200W	1160	24000	144	258*213*45

MONITORING PARAMETER

RESOLUTION	FOCCAL LENGTH	SYSTEM	NIGHT TIME VISUAL RANGE	ACTIVEWI-FI RANGE	APP PLATFORM	TF CARD
1080 DAY & NIGHT FULL-COLOR	4MM	LINUX	BETTER WITHIN TEN METERS	UP TO 50 METERS IF THERE'S NO OBSTACLES	TUYA SMART	OPTIONS FROM 16G TO 128G



SOLAR GARDEN PRODUCTS

SOLAR GARDEN UFO LIGHTS



PRODUCT NAME	PRODUCT CODE	POWER (W)	SOLAR PANEL	LIFEPO4 BATTERY
SOLAR GARDEN LIGHT UFO 20W	UB-A10-J20-20W	20W	18V 30W	12.8V 11.3AH
SOLAR GARDEN LIGHT UFO 30W	UB-A10-J30-30W	30W	18V 40W	12.8V 25AH
SOLAR GARDEN LIGHT UFO 50W	UB-A10-J50-50W	50W	18V 50W	12.8V 32.8AH



SOLAR FLAME LIGHTS

PRODUCT NAME	PRODUCT CODE
SOLAR FLAME LIGHT	UB-UB96XMJ

SOLAR MOTION LIGHTS



PRODUCT NAME	PRODUCT CODE
SOLAR MOTION LIGHT 40LED	UB-SM-40LED
SOLAR MOTION LIGHT 114LED	UB-SM-114LED



SPIKE LIGHTS & OUTDOOR SPOT LIGHTS

GARDEN SPIKE LIGHT



PRODUCT NAME	PRODUCT CODE	POWER (W)	IP GRADE	MATERIAL
3W GARDEN SPIKE COOL	UB-SPIKE CW-3W	3W	IP 65	DIECASTING ALUMINIUM
3W GARDEN SPIKE WARM	UB-SPIKE WW-3W	3W	IP 65	DIECASTING ALUMINIUM
3W GARDEN SPIKE RED	UB-SPIKE RE-3W	3W	IP 65	DIECASTING ALUMINIUM
3W GARDEN SPIKE BLUE	UB-SPIKE BL-3W	3W	IP 65	DIECASTING ALUMINIUM
3W GARDEN SPIKE GREEN	UB-SPIKE GR-3W	3W	IP 65	DIECASTING ALUMINIUM
3W GARDEN SPIKE RGB	UB-SPIKE RGB-3W	3W	IP 65	DIECASTING ALUMINIUM



OUT DOOR SPOT LIGHT

PRODUCT NAME	PRODUCT CODE	POWER (W)	IP GRADE	MATERIAL
10W OUT DOOR SPOT LIGHT	UB-SPOT-B-10	10W	IP 65	DIECASTING ALUMINIUM
20W OUT DOOR SPOT LIGHT	UB-SPOT-B-20	20W	IP 65	DIECASTING ALUMINIUM
20W OUT DOOR SPOT LIGHT	UB-SPOT-D4-20	20W	IP 65	DIECASTING ALUMINIUM



THANK YOU

ENJOY A GLORIOUS FUTURE BY WIN-WIN
CO-OPERATION WITH UBITTER LED



TECHNOLOGY PARTNERS



UBITTER
THE INNOVATION OF LIGHTS LED



UBITTER TECHNOLOGIES

Pulikkayath Building, Kalappurakkal Nagar
H.M.T Colony P.O, Ernakulam, Cochin, Kerala - Pin: 683503

 04844 604896  +91 90740 48289  info@ubitter.com